




Vertical Rod Panic Bars (Fire-Rated) - 236 Series

Color/Finish

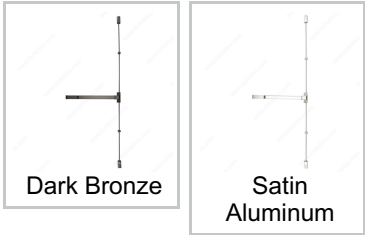

DESCRIPTION

Designed for moderate duty applications, our 236 series panic bars are field reversible, built to ANSI Grade 1 standards, and are fire-rated for up to 1-1/2 hours.

ADVANTAGES AND BENEFITS

- Cylinders: 6-pin standard where applicable - Material: push bar in extruded anodized aluminum, spring in stainless steel - Latchbolts: stainless steel

AVAILABLE PRODUCTS

Product #	Color/Finish
236EFVDB	Dark Bronze
236EFVAL	Satin Aluminum

TECHNICAL SPECIFICATIONS

Door Width Requirements	30 to 36 in
Required Door Height	Max. 7 ft
Dogging	Not an option
Projection Pushpad Depressed	1 7/8 in
Projection Pushpad Neutral	2 1/2 in
Top Latch	3/4 in
Bottom Latch	3/4 in
Backset	2 3/4 in
Minimum Frame Width	4 1/2 in
Strike	1/2 in
Standards and Certifications	UL10C, UBC 7-2-1997, ANSI BHMA A156.3
Door Thickness	1 3/4 in
Handing Position / Opening Side	Reversible for Left or Right
Grade	1
Fire-Rating	1h30
Mounting Hardware	Included
Latchbolt Throw	3/4 in
Deadbolt Throw	1/2 in
Length	33 1/4 in
Projection	2 1/2 in
Finish Warranty	5 Years
Mechanical Warranty	10 Years

PRODUCT PHOTOS

