


## Rim Type Panic Bars (Fire-Rated) - 236 Series

### Color/Finish

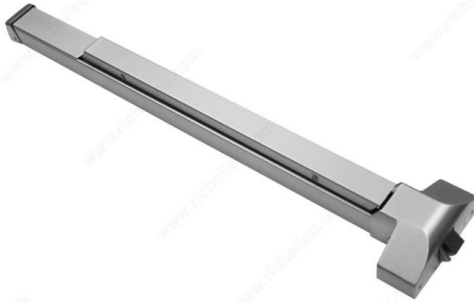

### DESCRIPTION

Designed for moderate duty applications, our 236 series panic bars are built to ANSI Grade 1 standards and are fire-rated for up to 1-1/2 hours.

### ADVANTAGES AND BENEFITS

- Cylinders: 6-pin standard where applicable - Material: push bar in extruded anodized aluminum, spring in stainless steel - Latchbolts: 19.05 mm (3/4") throw, stainless steel

### AVAILABLE PRODUCTS

Product #	Color/Finish
<b>236EFRDB</b>	Dark Bronze
<b>236EFRAL</b>	Satin Aluminum

## TECHNICAL SPECIFICATIONS

Door Width Requirements	30 to 36 in
Minimum Frame Width	4 1/4 in
Grade	1
Standards and Certifications	UL10C, UBC 7-2-1997, ANSI BHMA A156.3
Fire-Rating	1h30
Door Thickness	1 3/4 in
Backset	2 3/4 in
Strike	5/8 in
Projection Pushpad Depressed	1 7/8 in
Projection Pushpad Neutral	2 1/2 in
Handing Position / Opening Side	Reversible for Left or Right
Mounting Hardware	Included
Retaining	Not an Option
Mounting Height	40 5/16 in
Dogging	1/4 in
Latchbolt Throw	3/4 in
Deadbolt Throw	1/2 in
Length	36 in
Projection	2 1/2 in

## PRODUCT PHOTOS

